



Model : i-NS0408

- 4x8mm Side bend FLEX LED NEON is horizontal bending with diameter of 30mm;
- It is made of Dow Chemical SILASTIC™ ET-7021 silicone rubber, which provides high transparency and high strength, environmental protection grade silicone material;
- It's integrated extrusion molding process, uniform lighting surface and no shadow;
- IP67 protection level, salt solution resistance, acids & alkalis, corrosive gases, fire and UV;
- 3 & 5 years warranty are available, Surface frosting process is optional.




Min bending diameter



Unit: mm
Cross section



Dimension

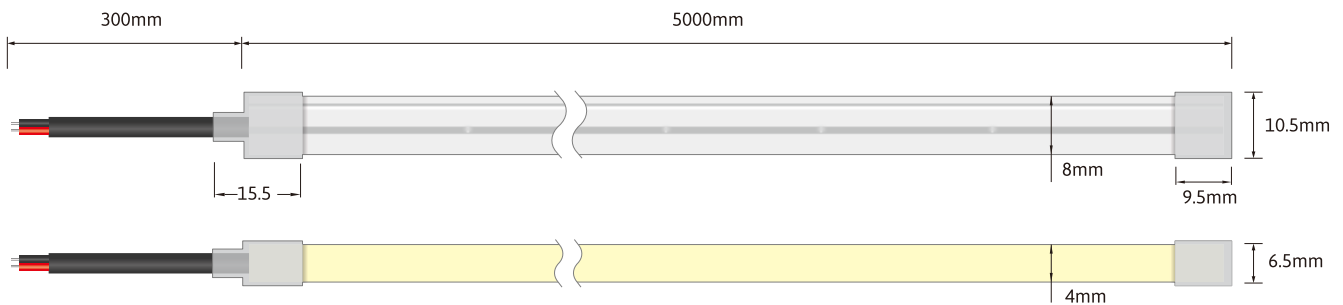







| Technical Data | |
|---------------------------------------|--|
| CCT(K) | 2100K , 2400K , 2600K , 3000K , 3500K , 4200K , 5300K , Red , Green , Blue , Yellow , Pink |
| Working Voltage | DC24V |
| CRI | >90 |
| Rated Power/m | 6W |
| Storage Temperature | -25 C ~60 C |
| Ambient Temperature | T _{min} = -25 C , T _{max} [Table below] |
| LEDNEON N0408 | Low Output |
| Power(W/m) | 6W/m |
| Max.Ambient tempt.(T _{max}) | 55 C |

| | |
|--------------------|--|
| Color |  Single color |
| CCT(K) | 3000K±150 |
| CRI | ≥90 |
| Voltage | DC24V |
| Power(W) | 6 |
| Lumen(LM/M) | 253.2 |
| Unit Length (mm) | 25 |
| Max. Run Length(M) | 5 |
| CC/CV | CV |

Note:

- Max. run length refers to single side feed in serial connection.
- The given data are typical values due to the tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- The given color temperature is the temperature of finished product.

| | | |
|---|---|--|
|  Voltage 24v DC |  UV Protection |  Consistency One Bin |
|  Length 5M |  Waterproof Grade IP 65 |  Warranty 3 Years |

