



## Model : i-NS0612

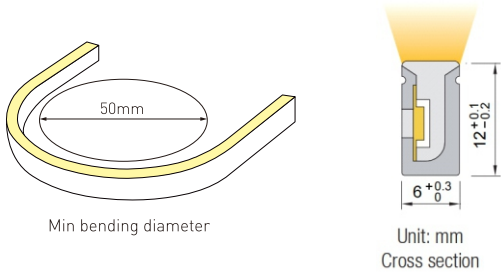

- 6x12mm Side bend FLEX LED NEON is horizontal bending with diameter of 50mm;
- It is made of Dow Chemical SILASTIC™ ET-7021 silicone rubber, which provides high transparency and high strength, environmental protection grade silicone material;
- It's integrated extrusion molding process, uniform lighting surface and no shadow;
- IP67 protection level, salt solution resistance, acids & alkalis, corrosive gases, fire and UV;
- 3 & 5 years warranty are available, Surface frosting process is optional.

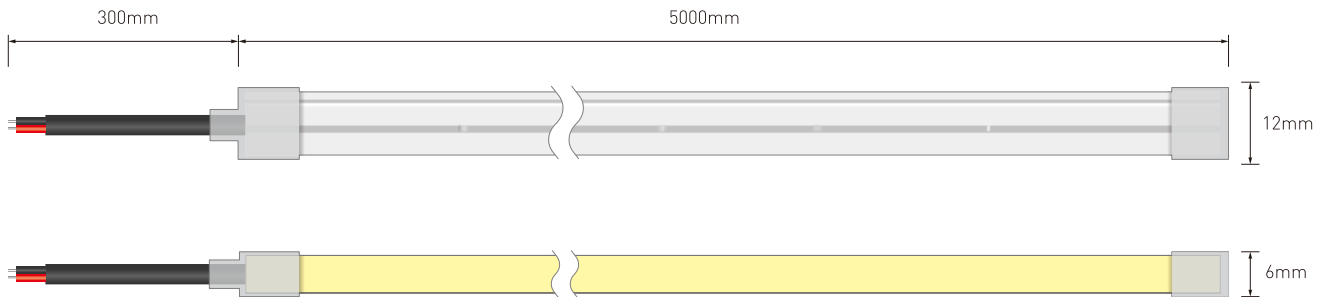

### Dimension



Technical Data		
CCT(K)	2100K, 2400K, 2700K, 3000K, 3500K, 4000K, 5000K 6500K, Red, Green, Blue, Yellowr, Pink	
CRI	>90	
Rated Power/m	5w/10w	
Storage Temperature	-25 C ~60 C	
Ambient Temperature	T <sub>min</sub> = -25 C, T <sub>max</sub> (Table below)	
<b>LEDNEON N0612</b>	<b>Low Output</b>	<b>STD Output</b>
Power[W/m]	5W	10W
Max.Ambient tempt.(T <sub>max</sub> )	55 C	45 C

Color	 Single color	 CCT Tunable	 RGB
CCT(K)	3000K±150	W+WW	RGB
CRI	≥90	≥90	--
Voltage	DC24V	DC24V	DC24V
Power(W)	10	10	10
Lumen(LM/M)	300	270	130
Unit Length (mm)	50	50	50
Max. Run Length(M)	13(CC)	5	5
CC/CV	CC/CV	CV	CV

#### Note:

- Max. run length refers to single side feed in serial connection.
- The given data are typical values due to the tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- The given color temperature is the temperature of finished product.

