



## Model : i-NS1010

- 10x10mm Side bend FLEX LED NEON is horizontal bending with diameter of 100mm; It is made of Dow Chemical SILASTIC™ ET-7021 silicone rubber, which provides high
- transparency and high strength, environmental protection grade silicone material;
- It's integrated extrusion molding process, uniform lighting surface and no shadow;
- IP67 protection level, salt solution resistance, acids & alkalis, corrosive gases, fire and UV;
- 3 & 5 years warranty are available, Surface frosting process is optional.

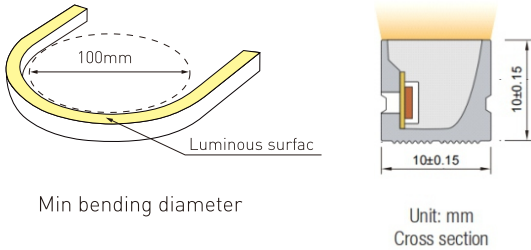

## Dimension

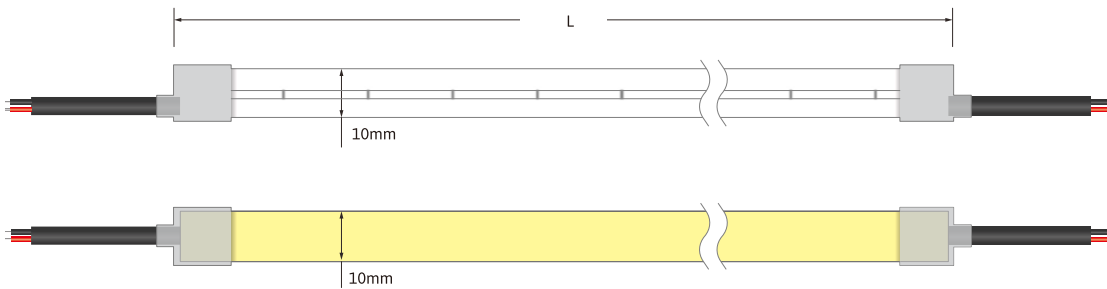




Technical Data		
CCT(K)	2100K , 2400K , 2700K , 3000K , 3500K , 4000K , 5000K 6500K , Red , Green , Blue , Yellow , Pink	
Working Voltage	DC24V	
CRI	>90	
Rated Power/m	5w/10w	
Storage Temperature	-25 C ~60 C	
Ambient Temperature	T <sub>min</sub> =-25 C , T <sub>max</sub> [Table below]	
LEDNEON N0612	Low Output	STD Output
Power[W/m]	5W	10W
Max.Ambient tempt.(T <sub>max</sub> )	55 C	45 C

Color	 Single color
CCT(K)	3000K±150
CRI	≥90
Voltage	DC24V
Power(W)	10
Lumen(LM/M)	620
Unit Length (mm)	35.7
Max. Run Length(M)	5
CC/CV	CV

### Note:

- When ambient temperature reaches 55 C, the power is suggested to be 5W/M.
- Max. run length refers to single side feed in serial connection.
- The given data are typical values due to the tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- The given color temperature is the temperature of finished product.

 Voltage 24v DC	 UV Protection	 Consistency One Bin
 Length 5M	 Waterproof Grade IP 67	 Warranty 3 Years

