




i-INL-416



DIMENSION

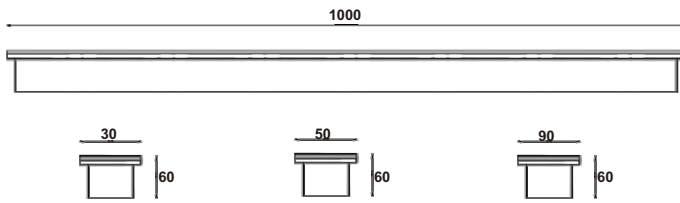

Specication

	i-INL-416A	i-INL-416B	i-INL-416B	
Power (Luminaire)	15W	15W	30W	
LED Type	15Pcs	60Pcs	120Pcs	Epistar/Osram/CREE
CRI	>90			
Size	L1000*W30*H60	L1000*W50*H60	L1000*W90*H60	
Lumen (Luminaire)	25lm/W			
Input Volt	DC 24V			
Color Temperature	1800K-6500K, R, G, B, Y, RGB, RGBW			
Beam Angle	120°			
Driver	Nondim / Dimmer Triac 0-10v / DMX512			
LED Life	50000h			
IP Rating	IP 67			
Load capacity	IK 10, Max 2000Kg load			
Enclosure Material	304/316 Stainless steel			
Glass	Tempered glass T12mm, / Frosted treatment			

