



## Model : i-NS3032



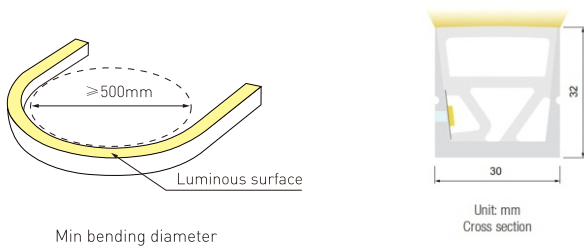

- 30x32mm Side bend FLEX LED NEON is horizontal bending with diameter of 500mm;
- It is made of Dow Chemical SILASTIC™ ET-7021 silicone rubber, which provides high transparency and high strength, environmental protection grade silicone material;
- It's integrated extrusion molding process, uniform lighting surface and no shadow;
- IP67 protection level, salt solution resistance, acids & alkalis, corrosive gases, fire and UV;
- 3 & 5 years warranty are available, Surface frosting process is optional.

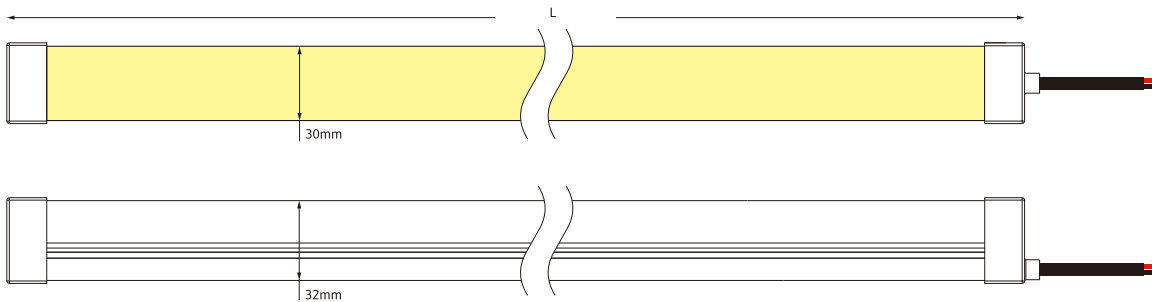

## Dimension




Technical Data	
CCT(K)	2700K , 3000K , 4000K , 6500K Red , Green , Blue , Yellow , Pink
Working Voltage	DC24V
CRI	>90
Rated Power/m	15w
Storage Temperature	-25 C ~60 C
Ambient Temperature	T <sub>amin</sub> =-25 C , T <sub>amax</sub> (Table below)
LEDNEON 3020 <b>Low Output</b>	
Power(W/m)	15W
Max.Ambient tempt.(T <sub>amax</sub> )	55 C

Color	 Single color	 CCT Tunable	 RGB	 RGBW
CCT(K)	3000K±150	W+WW	RGB	RGB+WW(3000K)
CRI	≥90	≥90	--	>90
Voltage	DC24V	DC24V	DC24V	DC24V
Power(W)	15	15	15	3.8
Lumen(LM/M)	660	650	375	518
Unit Length (mm)	50	62.5	83.3	83.3
Max. Run Length(M)	12 (CC)	5	5	5
CC/CV	CC/CV	CV	CV	CV

### Note:

- When ambient temperature reaches 55 C, the power is suggested to be 15W/M.
- Max. run length refers to single side feed in serial connection.
- The given data are typical values due to the tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- The given color temperature is the temperature of finished product.

 Voltage <b>24v DC</b>	 UV <b>Protection</b>	 Consistency <b>One Bin</b>
 Length <b>5M</b>	 Waterproof Grade <b>IP 67</b>	 Warranty <b>3 Years</b>

