



Model : i-NT0606

- 6x6mm FLEX LED NEON is Vertical bending with diameter of 50mm;
- It is made of Dow Chemical SILASTIC™ ET-7021 silicone rubber, which provides high transparency and high strength, environmental protection grade silicone material;
- It's integrated extrusion molding process, uniform lighting surface and no shadow;
- IP67 protection level, salt solution resistance, acids & alkalis, corrosive gases, fire and UV;
- 3 & 5 years warranty are available, Surface frosting process is optional.

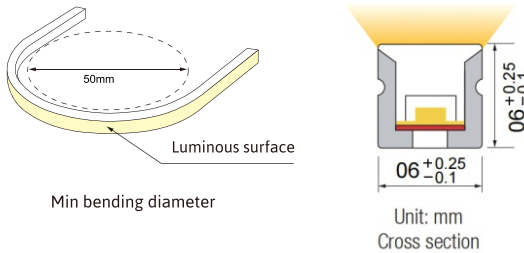

Dimension

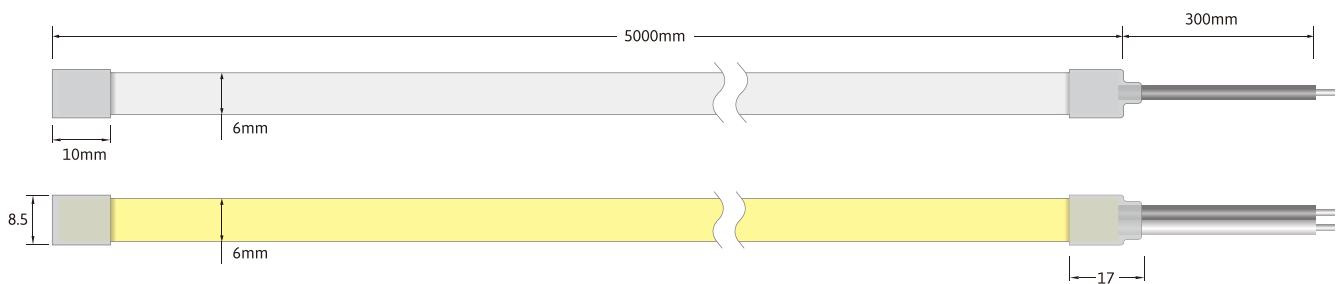






Technical Data	
CCT(K)	1700K, 2200K, 2400K, 2600K, 2800K, 3200K 3800K, 4400K, 5600K
Working Voltage	DC24V
CRI	>90
Rated Power/m	6w
Storage Temperature	-25 C ~60 C
Ambient Temperature	T _{min} =-25 C, T _{max} (Table below)
LEDNEON 0606 Low Output	
Power(W/m)	6W
Max.Ambient tempt.(T _{max})	55 C

Color	 Single color
CCT(K)	3200K ⁺³⁰⁰ ₋₂₀₀
CRI	≥90
Voltage	DC24V
Power(W)	6
Lumen(LM/M)	348
Unit Length (mm)	25
Max. Run Length(M)	5
CC/CV	CV

Note:

- Max. run length refers to single side feed in serial connection.
- The given data are typical values due to the tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- The given color temperature is the temperature of finished product.

 Voltage 24v DC	 UV Protection	 Consistency One Bin
 Length 5M	 Waterproof Grade IP 67	 Warranty 3 Years

