

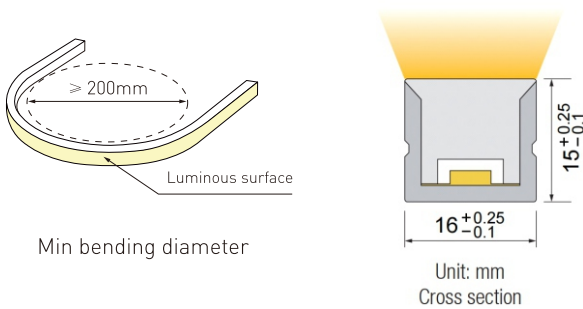


Model : i-NT1615B

- 16x15mm BLACK FLEX LED NEON is Vertical bending with diameter of 200mm;
- It is made of Dow Chemical SILASTIC™ ET-7021 silicone rubber, which provides high transparency and high strength, environmental protection grade silicone material;
- It's integrated extrusion molding process, uniform lighting surface and no shadow;
- IP67 and IP68 protection level, salt solution resistance, acids & alkalis, corrosive gases, fire and UV;
- 3 & 5 years warranty are available, Surface frosting process is optional.

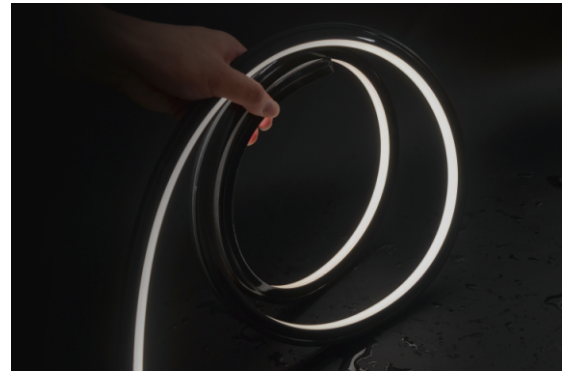

Dimension

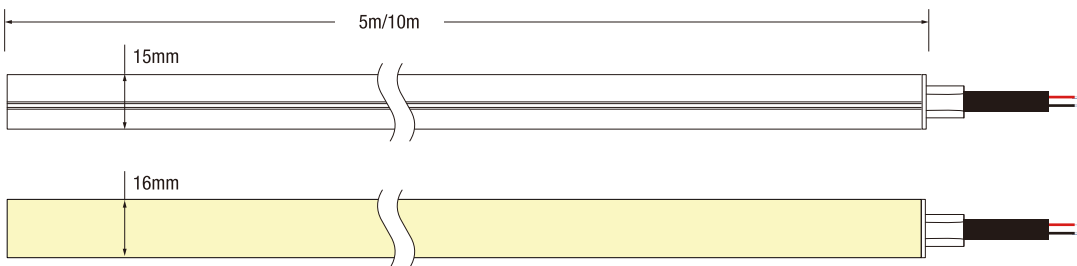

Technical Data

CCT(K)	2400K, 2700K, 3000K, 4000K, 5800K Red, Green, Blue, Yellow, Orange, Pink
Working Voltage	DC24V
CRI	>90
LED PIN Temperature	Max. 65 C
Storage Temperature	-25 C ~60 C
Ambient Temperature	Min.-25°C, Max Table below

LEDNEON 1615B	Low Output	Std Output	High Output
Power(W/m)	5w/m	10w/m	15w/m
Max.Ambient tempt.(T _{amb})	55 C	45 C	35 C

Note:

- Max. run length refers to single side feed in serial connection.
- The given data are typical values due to the tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- The given color temperature is the temperature of finished product.

	 Single color	 CCT Tunable	 RGB
CCT(K)	3000K±150	WW+W2700K+6300K	RGB
CRI	≥ 90	≥ 90	--
Voltage	DC24V	DC24V	DC24V
Power(W)	10	10	10
Lumen(LM/M)	153	181	90
Unit Length (mm)	50	83.3	83.33
Max. Run Length(M)	17(CC)	5	5
CC/CV	CC/CV	CV	CV

 Voltage 24v DC	 UV Protection	 Consistency One Bin
 Length 5M	 Waterproof Grade IP 67	 Warranty 3 Years

