



Model : i-NS1220B

- 12x20mm Side bend BLACK FLEX LED NEON is horizontal bending with diameter of 150mm;
- It is made of Dow Chemical SILASTIC™ ET-7021 silicone rubber, which provides high transparency and high strength, environmental protection grade silicone material;
- It's integrated extrusion molding process, uniform lighting surface and no shadow;
- IP67 and IP68 protection level, salt solution resistance, acids & alkalis, corrosive gases, fire and UV;
- 3 & 5 years warranty are available, Surface frosting process is optional.

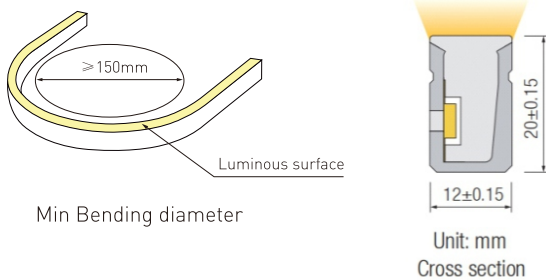

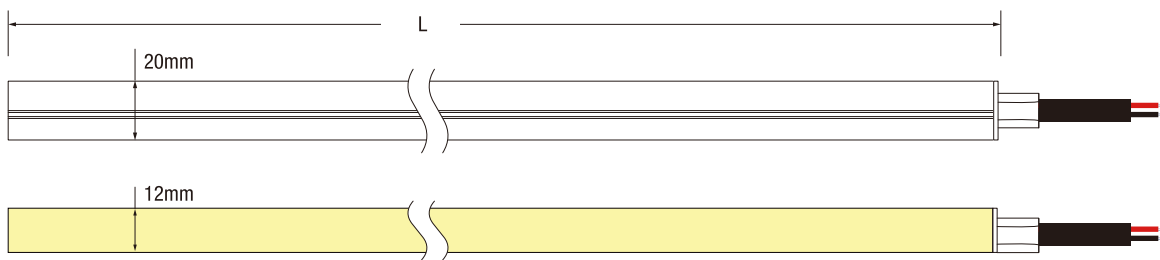


Dimension



Technical Data

CCT(K)	2400K ,2700K , 3000K , 4000K , 5800K Red , Green , Blue , Yellowr , Orange , Pink		
Working Voltage	DC24V		
CRI	≥90		
LED PIN Temperature	Max. 65 C		
Storage Temperature	-25 C ~60 C		
Ambient Temperature	Min.-25°C, Max [Table below]		
LEDNEON 1615B	Low Output	Std Output	High Output
Power(W/m)	5w/m	10w/m	15w/m
Max.Ambient tempt.(T _{amax})	55 C	45 C	35 C

	 Single color	 CCT Tunable	 RGB
CCT(K)	3000K±150	WW+W	RGB
CRI	≥90	≥90	--
Voltage	DC24V	DC24V	DC24V
Power(W)	10	10	10
Lumen(LM/M)	153	17	90
Unit Length (mm)	50	50	62.5
Max. Run Length(M)	17(CC)	5	5
CC/CV	CC/CV	CV	CV

Note:

- Max. run length refers to single side feed in serial connection.
- The given data are typical values due to the tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- The given color temperature is the temperature of finished product.

