



Model : i-NR25B

- Unique black silicone body, 360° emitting uniform without shadow;
- IP65 protection level with integrated extrusion molding process, high light transmittance, environment-friendly silicone material;
- Salt resistance, acid & alkali corrosion resistance, UV and fire resistance;
- 3 years warranty, Surface frosting process is optional.




Diameter






Minimum bending diameter

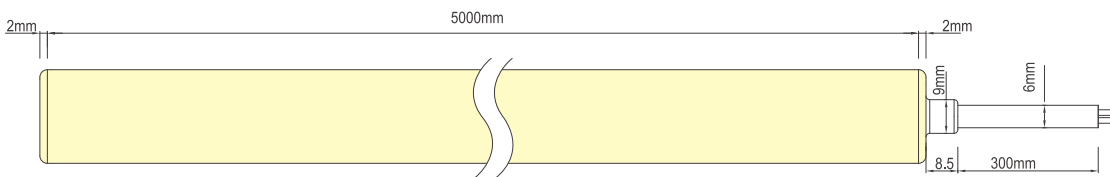Dimension



Technical Data	
CCT(K)	2400K, 2700K, 3000K, 4000K, 5000K Red, Green, Blue, Yellow, Pink
Working Voltage	DC24V
CRI	≥ 90
LED PIN Temperature	Max. 65°C
Storage Temperature	-25°C ~ 60°C
Ambient Temperature	Min. -25°C, Max [Table below]

	 Single color	 Tunable white	 RGB	 RGBW
CCT(K)	3000K±150	WW+CW2300+4000	RGB	RGB+WW(3000K)
CRI	≥ 90	≥ 90	--	>90
Voltage	DC24V	DC24V	DC24V	DC24V
Power(W)	10	10	10	10
Lumens(LM/M)	83	33	21	55
Unit cut (mm)	--	--	--	--
Max. productive Length(M)	5	5	5	5

Note:

- Max. run length refers to single side feed in serial connection.
- The given data are typical values due to the tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- The given color temperature is the temperature of finished product.

