



Model : i-NT1010

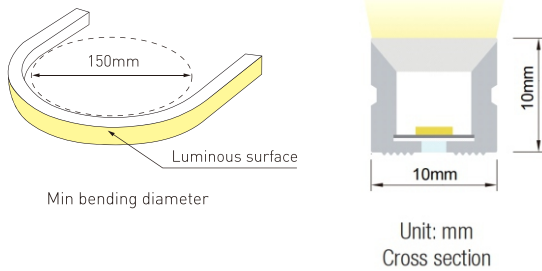


- 10x10mm FLEX LED NEON is Vertical bending with diameter of 150mm;
- It is made of Dow Chemical SILASTIC™ ET-7021 silicone rubber, which provides high transparency and high strength, environmental protection grade silicone material;
- It's integrated extrusion molding process, uniform lighting surface and no shadow;
- IP67 protection level, salt solution resistance, acids & alkalis, corrosive gases, fire and UV;
- 3 & 5 years warranty are available, Surface frosting process is optional.

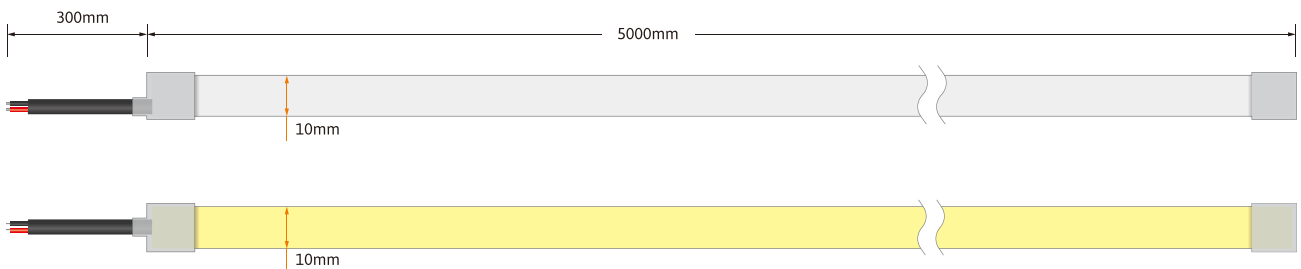

Dimension



Technical Data		
CCT(K)	2400K, 2700K, 3000K, 3500K, 4000K, 5000K 6500K, Red, Green, Blue, Yellow, Pink	
Working Voltage	DC24V	
CRI	>90	
Rated Power/m	5w/10w	
Storage Temperature	-25 C ~60 C	
Ambient Temperature	T _{min} =-25 C, T _{max} (Table below)	
LEDNEON 1010	Low Output	STD Output
Power(W/m)	5W	10W
Max.Ambient tempt.(T _{max})	55 C	45 C

Color	 Single color	 CCT Tunable	 RGB
CCT(K)	3000K±150	W+WW	RGB
CRI	≥90	≥90	--
Voltage	DC24V	DC24V	DC24V
Power(W)	10	10	10
Lumen(LM/M)	740	800	362
Unit Length (mm)	50	50	36.2
Max. Run Length(M)	13(CC)	5	5
CC/CV	CC/CV	CV	CV

Note:

- When ambient temperature reaches 55 C, the power is suggested to be 5W/M.
- Max. run length refers to single side feed in serial connection.
- The given data are typical values due to the tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- The given color temperature is the temperature of finished product.

