
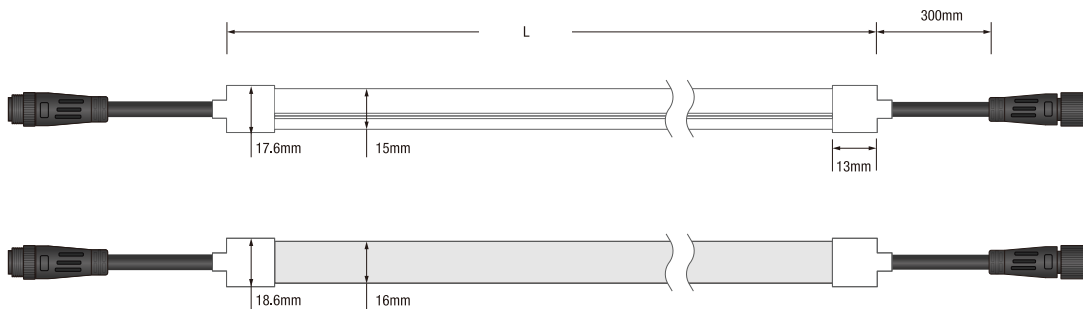


Model : i-NT1615SPI


SPI

Simple application, only need a single data cable can complete the transmission of data


- 16x15mm FLEX LED NEON is Vertical bending with diameter of 50mm;
- It is made of Dow Chemical SILASTIC™ ET-7021 silicone rubber, which provides high transparency and high strength, environmental protection grade silicone material; It's integrated extrusion molding process, uniform lighting surface and no shadow;
- IP67 protection level, salt solution resistance, acids & alkalis, corrosive gases, fire and UV;
- 3 & 5 years warranty are available, Surface frosting process is optional.



TY-NT1615V24P12-Crgb-UCS2603/WS2818

	Voltage (V)	Power (W/M)	CCT/Color	Lumen (LM /M)	Pixel (PCS)	Unit length (mm)	Signal Type	IC Model
RGB	DC24	12	RGB	262	8	125	Breakpoint Transmission	UCS2603/WS2818

TY-NT1615V24P15-Crgbw-UCS2904

	Voltage (V)	Power (W/M)	CCT/Color	Lumen (LM /M)	Pixel (PCS)	Unit length (mm)	Signal Type	IC Model
RGBW	DC24	14.5	RGBW	342	8	125	SPI	UCS2904

