


## Model : i-NTD16SPI


### SPI

Simple application, only need a single data cable can complete the transmission of data


- It is made of Dow Chemical SILASTIC™ ET-7021 silicone rubber, which provides high transparency and high strength, environmental protection grade silicone material;
- It's integrated extrusion molding process, uniform lighting surface and no shadow;
- IP67 protection level, salt solution resistance, acids & alkalis, corrosive gases, fire and UV;
- 3 & 5 years warranty are available, Surface frosting process is optional.



### Dimension structure

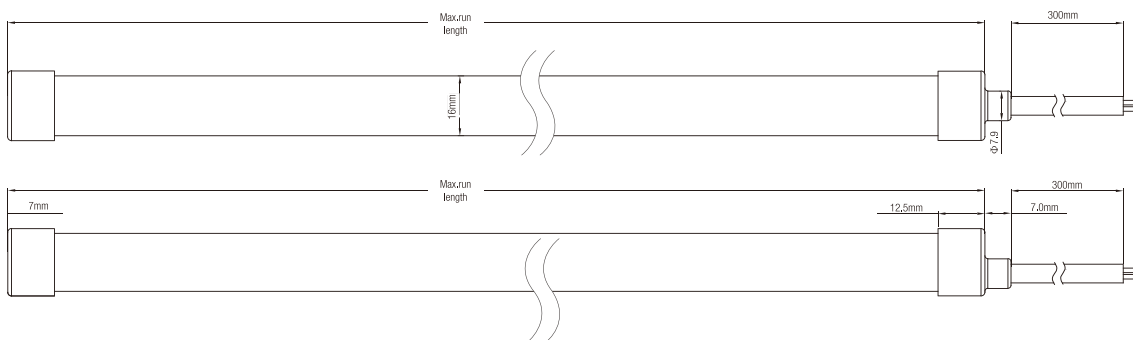

### TY-NTD16V24P13-Crgb-WS2811

 RGB	Voltage (V)	Power (W/M)	CCT/Color	Lumen (LM /M)	Pixel (PCS)	Unit length (mm)	Signal Type	IC Model
	DC24	12.5	RGB	294	10	100	SPI	WS2811

