


## Model : i-NR25SPI


### SPI

Simple application, only need a single data cable can complete the transmission of data


- Unique optical light distribution structure design, 360° emitting uniform without shadow;
- IP65 protection level with integrated extrusion molding process, high light transmittance, environment-friendly silicone material;
- Salt resistance, acid & alkali corrosion resistance, UV and fire resistance;
- 3 & 5 years warranty are available, Surface frosting process is optional.



## Dimension

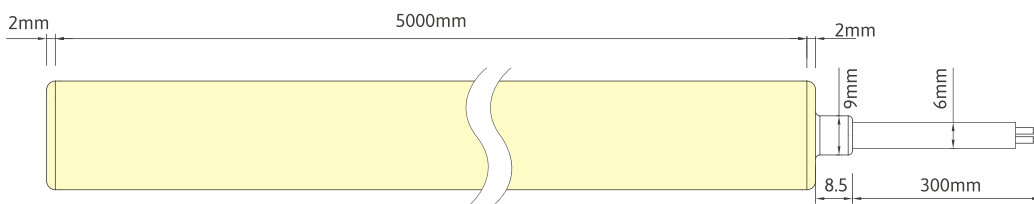

TY-NR25V24P13-Crgb-WS2811

 RGB	Voltage (V)	Power (W/M)	CCT/Color	Lumen (LM /M)	Pixel (PCS)	Unit length (mm)	Signal Type	IC Model
	DC24	12.5	RGB	474	10	100	SPI	WS2811

