

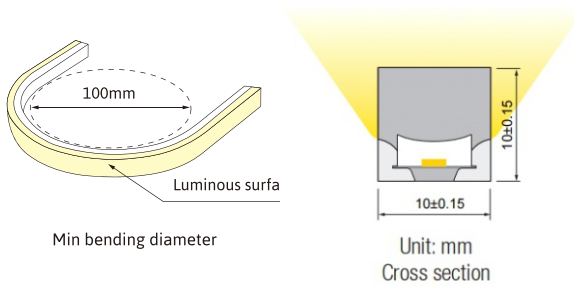


## Model : i-N3T1010

- 10x10mm Three Side Light FLEX LED NEON is Vertical bending with diameter of 100mm;
- It is made of Dow Chemical SILASTIC™ ET-7021 silicone rubber, which provides high transparency and high strength, environmental protection grade silicone material;
- It's integrated extrusion molding process, uniform lighting surface and no shadow;
- IP67 protection level, salt solution resistance, acids & alkalis, corrosive gases, fire and UV;
- 3 & 5 years warranty are available, Surface frosting process is optional.

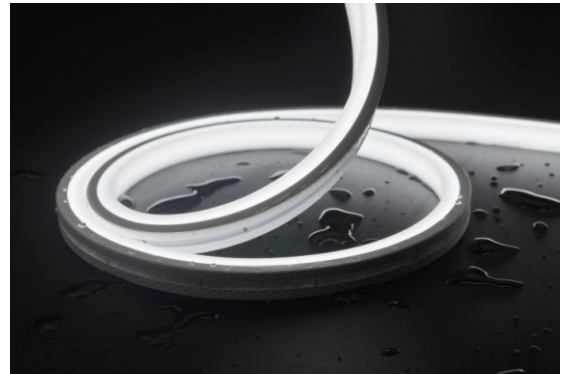

### Dimension

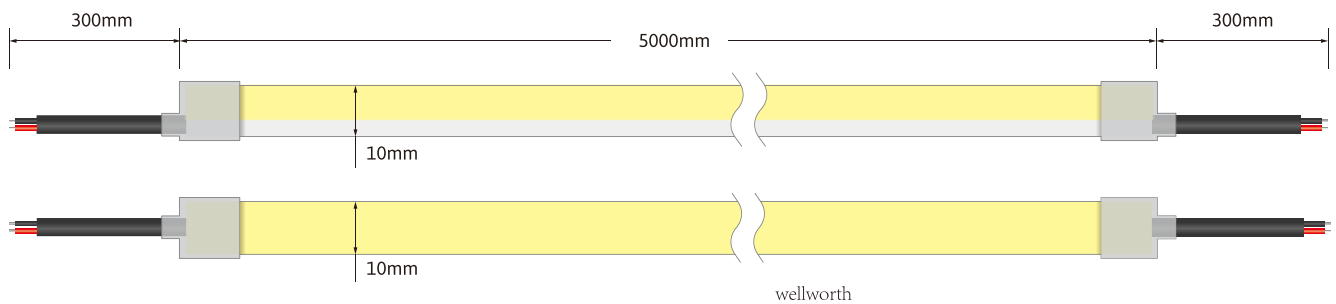


| Technical Data                          |   |                   |
|---|---|-------------------|
| CCT(K)                                  | 2400K , 2700K , 3000K , 3500K , 4000K , 5000K<br>6500K , Red , Green , Blue , Yellow , Pink |                   |
| Working Voltage                         | DC24V   |                   |
| CRI                                     | >90   |                   |
| Rated Power/m                           | 5w/10w  |                   |
| Storage Temperature                     | -25 C ~60 C   |                   |
| Ambient Temperature                     | T <sub>a min</sub> = -25 C , T <sub>a max</sub> (Table below)                               |                   |
| <b>LEDNEON 1010</b>                     | <b>Low Output</b>   | <b>STD Output</b> |
| Power(W/m)                              | 5W  | 10W               |
| Max.Ambient tempt.(T <sub>a max</sub> ) | 55 C  | 45 C              |

|                    |   |
|--------------------|---|
| Color              | <br>Single color |
| CCT(K)             | 3000K±150   |
| CRI                | ≥90   |
| Voltage            | DC24V   |
| Power(W)           | 10  |
| Lumen(LM/M)        | 790   |
| Unit Length (mm)   | 35.7  |
| Max. Run Length(M) | 5   |
| CC/CV              | CV  |

#### Note:

- Max. run length refers to single side feed in serial connection.
- The given data are typical values due to the tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- The given color temperature is the temperature of finished product.

|  |   |  |
|--|---|--|
| <br>Voltage<br><b>24v DC</b> | <br>UV<br><b>Protection</b>          | <br>Consistency<br><b>One Bin</b> |
| <br>Length<br><b>5M</b>      | <br>Waterproof Grade<br><b>IP 67</b> | <br>Warranty<br><b>3 Years</b>    |

