



Model : Flexible Led Wall Grazer - i-WL2621Pro

- Using optical grade environmental protection silicone material, salt resistance, acid and alkali corrosion resistance, flame retardant, UV resistance;
- The free bending structure design can perfectly fit the outdoor curved surface of various arcs to achieve the effect of wall washing
- Integrated extrusion molding process, waterproof grade up to Ip65;
- Patented optical structure design, a variety of angles optional;
- Hidden end cap design, easy to install;

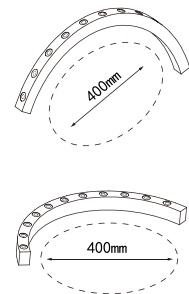

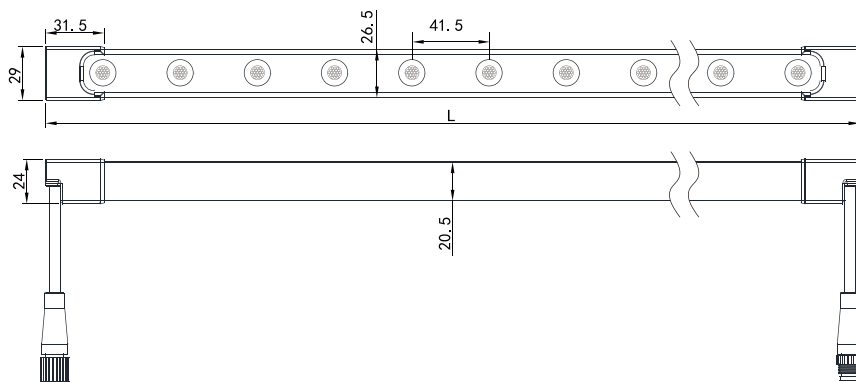



Dimension






Bending Diameter

Technical Data	
Input Voltage	24V
CRI	>80
Beam angle(50%)	15°/30°/50°/720°*35°/18°*20°/20°*55°
LEDs / M	24LEDs
Warranty period	3 years
Control mode	PWM
Working temperature	-25°C ~ +40°C
Cutable length	250mm
Waterproof level	IP65
Max.run length	5m
Net weight	590g/m







	CCT(K)	Power(W)	LEDs/m	CRI	IES lm/m	Efficiency lm/m
 Single color	3000K±200	24	24PCS	80	1580	65.8
 RGB	R	6	24PCS	/	150	25.0
	G	6			360	60.0
	B	6			65	10.8
RGB	RGB	18	515	28.6		
 Tunable white	2700K ±150K	12	24PCS	80	850	70.8
	6500K ^{+300K} / _{-500K}	12			840	70.0
	2700K+6500K	24			1600	66.7
 DMX512RGB	DMX512RGB	6	24PCS	/	145	24.2
		6			360	60.0
		6			65	10.8
		18			515	28.6

Note:



1. Test ambient temperature is 25°C(±2°C);
2. Brightness deviation is ±10%;
3. The Angle of the test sample is 30°;





Light Distribution Curve

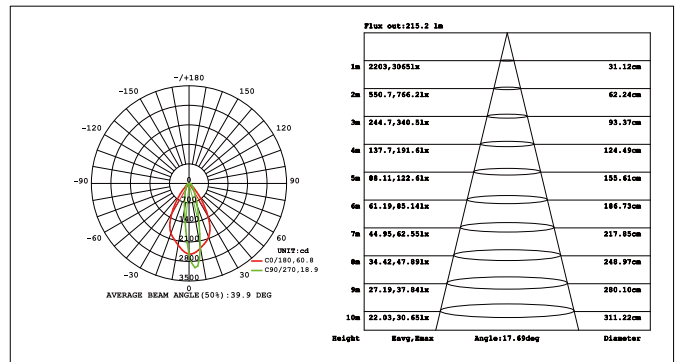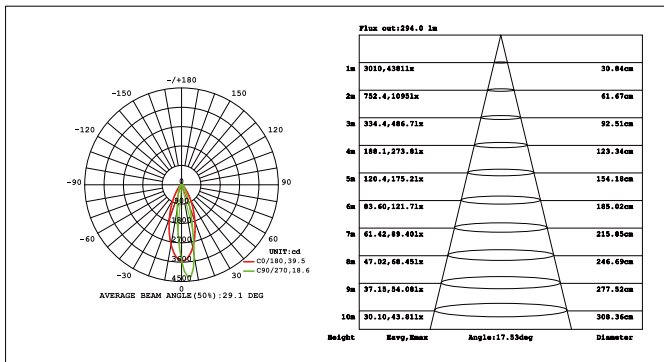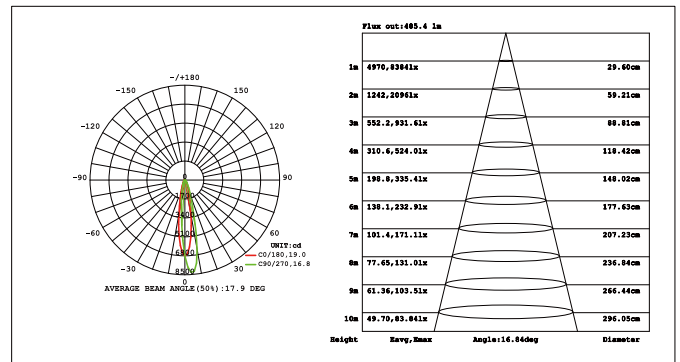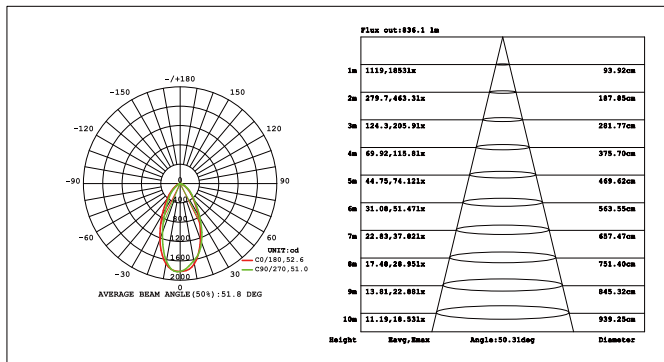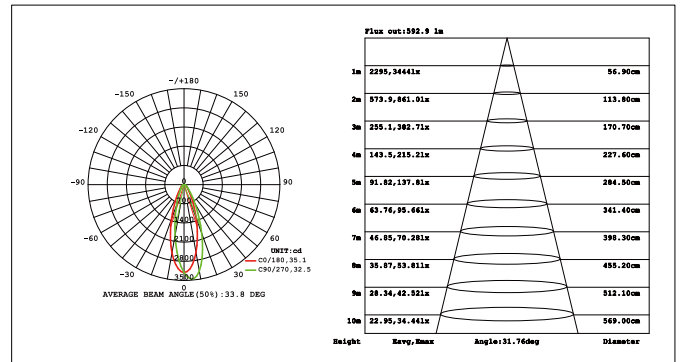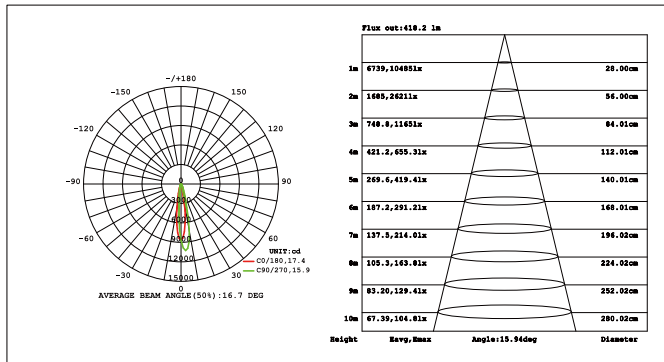

Aluminum Clip

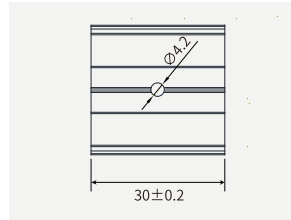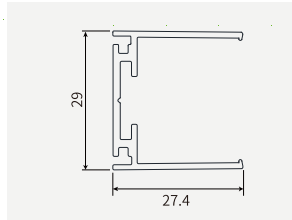

Adjustable Angle Clip (use with aluminum clips or profile)

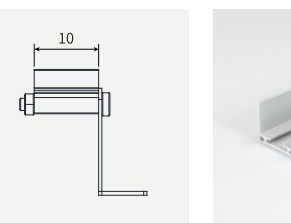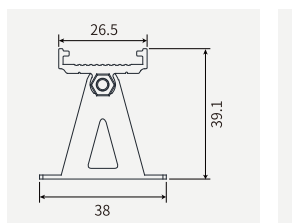

Aluminum Profile

