



## Model : Flexible Led Wall Grazer i-WLT28

- Adopting TPU material, it's resistant to yellowing, high temperature, corrosion, weak acid and alkali, and has great flexibility.
- PU glue is used for filling and sealing, so that it has strong adhesion, good durability and high reliability.
- It can replace the traditional hard wall washer light or LED strip. It's small in size, light in weight, flexible and easy to install.
- Various beam angles (30°, 45°, 60°, 20°\*45°) are available for different applications.
- With low voltage DC24V, higher safety factor



### Dimension


#### i-WLT28Q48V24P18-CCx-BAx

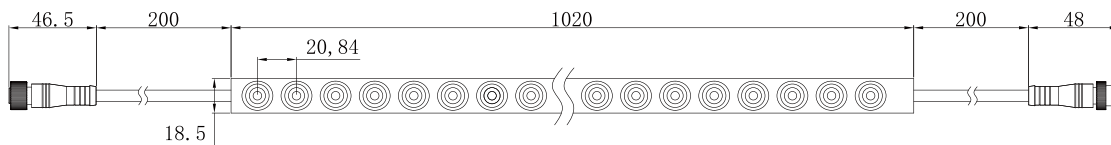


The max. length for per roll is 5meters.




#### i-WLT35Q36V24P8-Crgb-BAx-DMX512

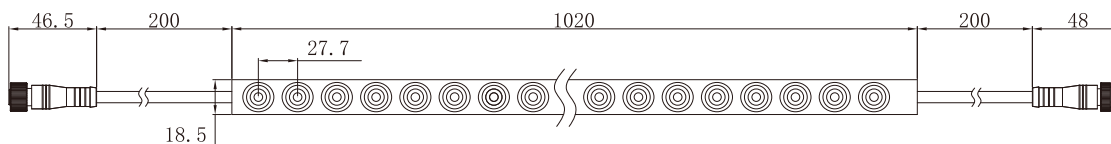

The max. length for per roll is 5meters.



#### i-WLT35Q42V24Px-Crgb rgbw-BAx

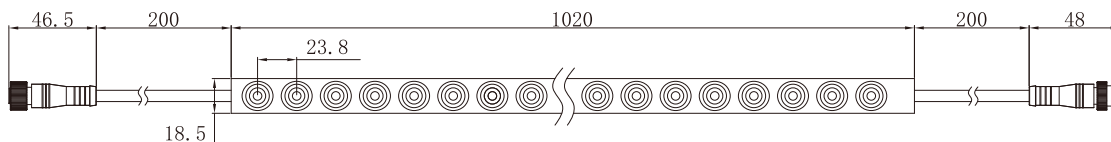

The max. length for per roll is 5meters.



**i-WLT28Q48V24P18-CCx-BAx**

CCT	Voltage	LED QTY/M	Power/M	Lumens(3000K)	Beam angle	Cutting Length	Working temperature
2700K/3000K/4000K/6500K	DC24V	48	18	1915 lm	30°/45°/60° /20*45°	125mm	-25°C/~+45°C

**i-WL T35Q42V24Px-Cx-BAx**

CCT	Voltage	LED QTY/M	Power/M	Lumens	Beam angle	Cutting Length	Working temperature
RGB	DC24V	42	6.2W	264 lm	15°/30°/45° /15*60°	166.6mm	-25°C/~+45°C
RGBW	DC24V	42	8W	540 lm	15°/30°/45° /15*60°	166.6mm	-25°C/~+45°C

**i-WLT28Q48V24P18-CCx-BAx**

CCT	Voltage	LED QTY/M	Power/M	Lumens(3000K)	Beam angle	Cutting Length	Working temperature
RGB	DC24V	36	8.5W	230 lm	15°/30°/45°/15*60°	166.6mm	-25°C/~+45°C

**Accessories**


3M Tape



Plastic Holding Clips



Stainless Steel Mounting Clips



Aluminum Profile

**Application**
